

Insert Pump Anchor

Pump Anchor for Set/Reset Pump Depth

When a seating nipple for an insert pump is not present in the tubing, the Don-Nan insert pump anchor serves the dual purpose of anchoring the pump and packing off the fluid production string. The compression packing element is bonded to threaded steel insert to eliminate damage during anchor setting, releasing, or resetting. The split cone is backed up with an alloy retainer ring for strength comparable to a solid cone.

APPLICATIONS

- Bottom hold-down insert pumps
- 2 $\frac{3}{8}$ -in, 2 $\frac{7}{8}$ -in, and 3 $\frac{1}{2}$ -in [60.325-mm, 73.025-mm, and 88.9-mm] tubing strings

BENEFITS

- Enables ease of variability in pumping depth

FEATURES

- High-temperature packing element available
- No seating nipple required
- High-strength alloy retainer ring
- No rotation required

Don-Nan insert pump anchor operating sequence

1. Record pump stroke and setting stroke (24 in or 48 in [609.6 mm or 1,219.2 mm]) of the anchor. The figure represents the upward movement of the rodstring necessary to transfer the dowel pin from the running slot to the setting slot.
2. Attach anchor to pump and start into tubing with dowel pin in starting position.
3. Run pump to desired depth. Attach polished rod and lower to point established for bottom of stroke. Raise polished rod distance established in Step 1, then lower full weight of rods on the anchor to set and preload the packoff.
4. Reset the anchor by unseating it with a straight pull on the rodstring, then raise or lower it to the desired setting position. Reset as in Step 3.




Insert Pump Anchor

Insert Pump Anchor



Pump Anchor for Set/Reset Pump Depth

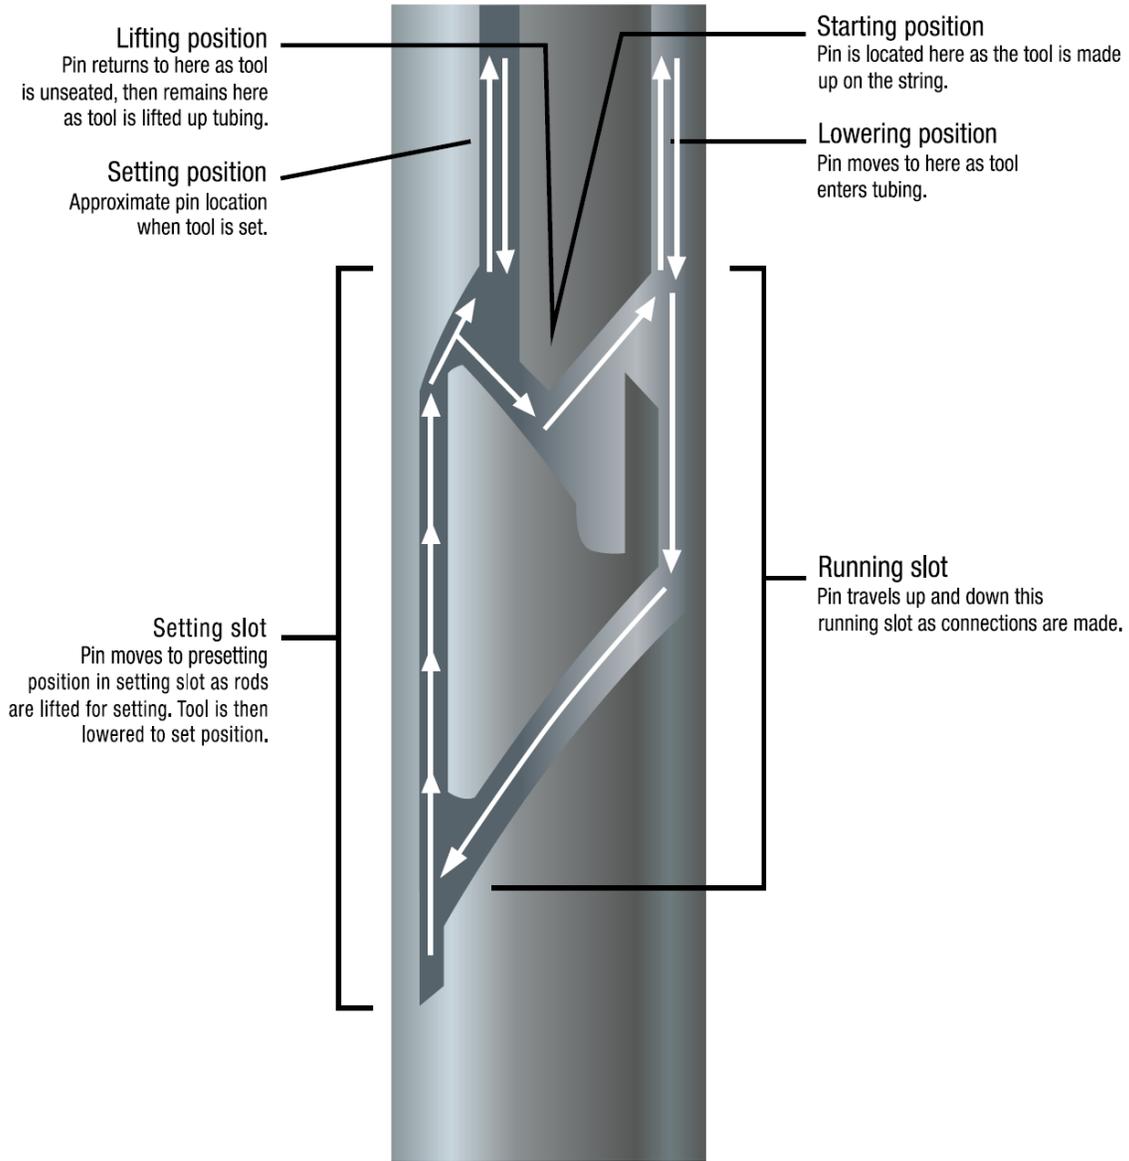

Pin location during setting, releasing, or resetting.

BUILT TO LAST

Made to Perform

Headquarters

811 Willow Oak Dr,
Missouri City, TX 77489
(281) 495-1100

Midland Campus

3427 E Hwy 158,
Midland, TX 79706
(432) 967-5575

LUFKIN Don-Nan is an API 11AX certified manufacturer for 25 continuous years and counting.

Ref: 09042022

lufkin.com/donnan