

# Slimhole Pump

Maximum production in minimum tubing

## APPLICATIONS

- Low fluid-level wells
- Gassy wells
- Shallow to deep wells

## BENEFITS

- Operable in 1 -1/2 11 tubing
- Allows full submersion in fluid

## FEATURES

- Thin-walled barrel
- Specially designed fittings

The Don-Nan Slimhole Pump is a small-bore, bottom hold-down rod insert pump designed for use in wells equipped with small liners or 1-1/2" tubing.

## Design

The Slimhole Pump is a modification of the API standard RWBC pump. Specially designed fittings enable this 1-1/4" bore pump to be placed into 1-1/2" tubing without compromising on production targets.



*Slimhole  
Pump*

# Slimhole Pump


Maximum production in minimum tubing



## Slimhole Pump Specifications

			Tubing x Pump Bore Size, in
			1 1/2 x 1 1/4
Description	Item	Req.	Part Number
<b>Stationary Assembly</b>			
Guide, valve rod	A		GR111
Connector Barrel	B		C101
Barrel	C	1	BT0320C
Cage, closed barrel	D		CF32
Valve, ball and seat	E		044 + 03
<b>Traveling Assembly</b>			
Top Pin	F		BR1-1
Rod, valve	G		VR1-192
Coupling, plunger adapter	H		PA214
Plunger	I	1	P214-5
Cage, closed plunger	J		CF21
Valve, ball and seat	K		042 + 02
Plug, seat (internal)	L		PS22
<b>Seating Assembly</b>			
API, 3-cup*	M	1	HD32-2

Barrel, barrel extensions, plunger, and valve rod must all be specified in length.  
All components may be specified by material and coating type.  
\*API mechanical-type seating assembly also available.

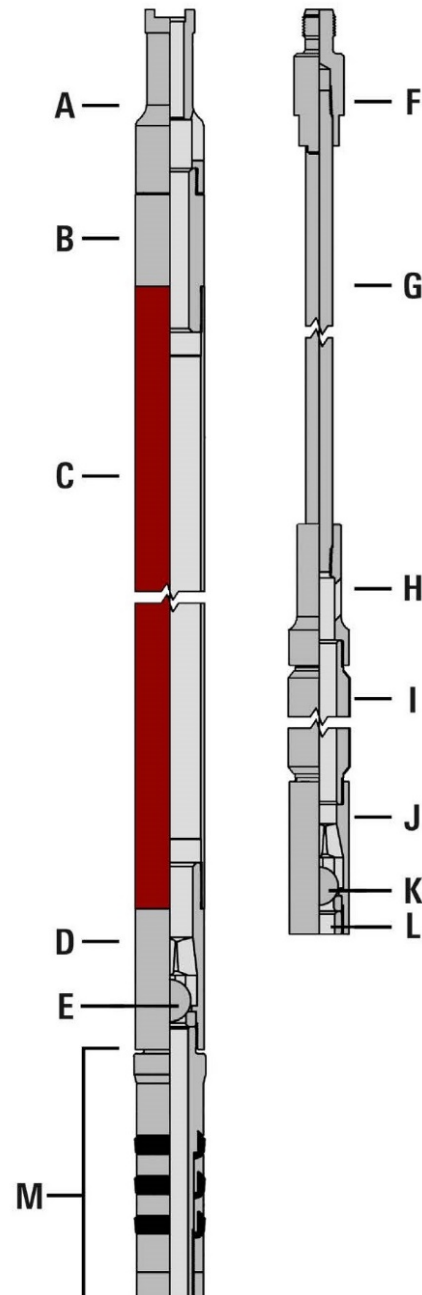

**BUILT TO LAST**

Made to Perform

### Headquarters

811 Willow Oak Dr,  
Missouri City, TX 77489  
(281) 495-1100

### Midland Campus

3427 E Hwy 158,  
Midland, TX 79706  
(432) 967-5575

LUFKIN Don-Nan is an API 11AX certified manufacturer for 25 continuous years and counting.

Ref: 09042022

[lufkin.com/donnan](http://lufkin.com/donnan)